



Electrical Characteristics

GI-BCT100-12

Maximum power at STC (Pmax)	100W
Optimum operating voltage (Vmp)	17.2V
Optimum operating current (Imp)	5.8 A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	6.46A
Short-circuit current temperature coefficient	(0.065±0.015) %/°C
Open-circuit voltage temperature coefficient	-(80±10) mV/°C
Peak power temperature coefficient	-(0.5±0.05) %/°C
NOCT (Air 20°C; Sun 0.8kW/m wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	±3%


STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Features


- Nominal 12V DC for standard output.
- High efficiency.
- Outstanding low-light performance.
- High transmission tempered glass.
- Rugged design to withstands high wind pressure and snow load, easy installation.
- Aesthetic appearance.
- Design to meet unique demand of customer.
- 25 year module output warranty.

Dimension

Unit:mm

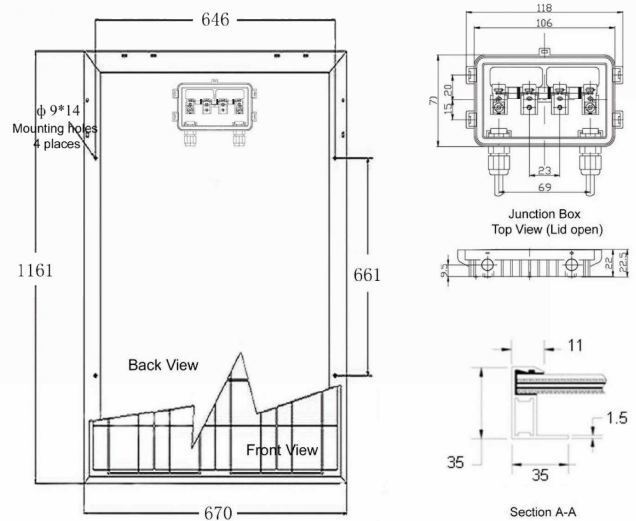

Characteristics

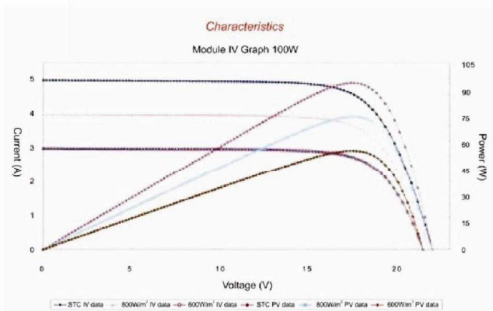

Specification

GI-BCT100-12

Cell	Poly-crystalline silicon solar cells
No. of cell and connection	36 (4×9)
Dimension of module	1161mm×670mm×35mm
Weight	8.6kg

Specifications are subject to change without notice at any time.