

LandStar series Solar Controller



LandStar series solar charge controller that adopts the most advanced digital technique and operates fully automatically. The Pulse Width Modulation (PWM) battery charging can greatly increase the lifetime of battery.

Application:


Ideal for off-grid solar lighting system that needs light and timer control

- ★ Solar street lights
- ★ Solar garden lights
- ★ Solar detection equipment at night



Features:

- ◆ 12/24V auto work
- ◆ High efficient Series PWM charging
- ◆ Gel, Sealed and Flooded battery type option
- ◆ Widely used, automatically recognize day/night
- ◆ Intelligent timer function with 1-15 hours option
- ◆ Digital LED menu with simple setting and easy using
- ◆ Use MOSFET as electronic switch
- ◆ Temperature compensation
- ◆ Electronic protection: over charging, over discharging, overload, short circuit , and overheating
- ◆ Reverse protection: any combination of solar module and battery

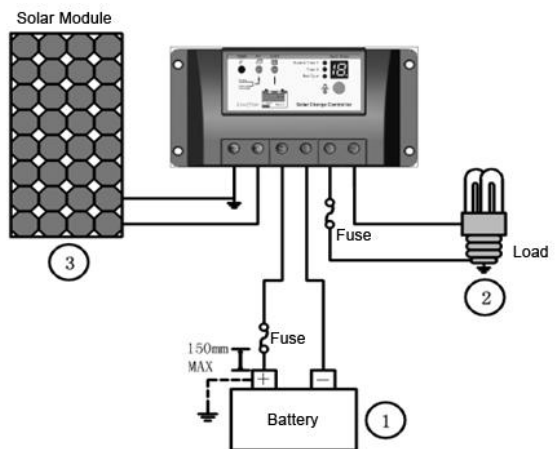

LandStar Series Solar Controller

Electrical parameters	GI-LS1024R	GI-LS1524R	GI-LS2024R
Nominal System Voltage	12 / 24VDC auto work		
Rated Battery Current	10A	15A	20A
Max. Battery Voltage	32V		
Charge Circuit Voltage Drop	≤0.26V		
Discharge Circuit Voltage Drop	≤0.15V		
Self-consumption	≤6mA		

Battery Voltage Parameters (temperature) at 25 °C			
Battery charging setting	Gel	Sealed	Flooded
Equalize Charging Voltage	—	14.6V;x2/24V	14.8V;x2/24V
Boost Charging Voltage	14.2V;x2/24V	14.4V;x2/24V	14.6V;x2/24V
Float Charging Voltage	13.8V;x2/24V	13.8V;x2/24V	13.8V;x2/24V
Low Voltage Reconnect Voltage	12.6V;x2/24V	12.6V;x2/24V	12.6V;x2/24V
Low Voltage Disconnect Voltage	11.1V;x2/24V	11.1V;x2/24V	11.1V;x2/24V
Equalize Duration	—	2 hours	2 hours
Boost Duration	2 hours	2 hours	2 hours

Environmental parameters		Mechanical Parameters		
		GI-LS1024R	GI-LS1524R/GI-LS2024R	
Working temperature	-35°C to +55°C	Overall dimension	140x65x34mm	144x75x45mm
Storage temperature	-35°C to +80°C	Mounting dimension	130x45mm	135x55mm
Humidity	10%-90%NC	Terminal	4mm ²	10mm ²
Enclosure	IP30	Net weight	0.15kg	0.25kg

Add : 7 Ahmed Tayseer st. Asafra 21539 Alex. Egypt

Tel: +2 01116655088

Fax: +203 5841481

E-mail: director@greeniso.net

Website: www.greeniso.net